


OPENING CASE ON TENNIS TUTOR MODELS

TO REMOVE HEX BOLTS 1 THRU 8, USE 5/32" HEX KEY
 NOTE: ON MACHINES BUILT AFTER 10/07 YOU MUST REMOVE AN ADDITIONAL CASE BOLT (SEE BELOW ON REAR VIEW DIAGRAM).


HOPPER SIDES (FLAPS)

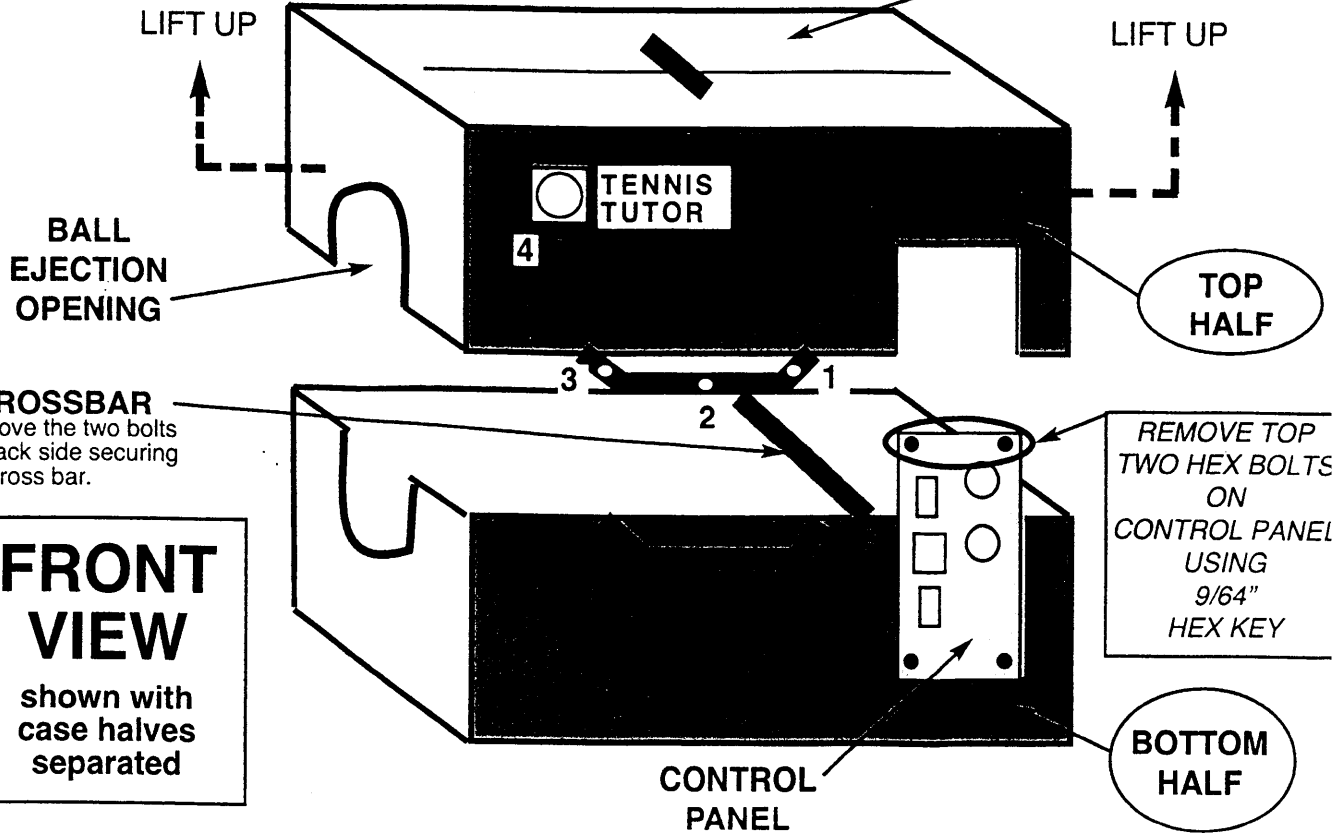

FRONT VIEW
 shown with case halves separated

REMOVE TOP TWO HEX BOLTS ON CONTROL PANEL USING 9/64" HEX KEY


REAR VIEW

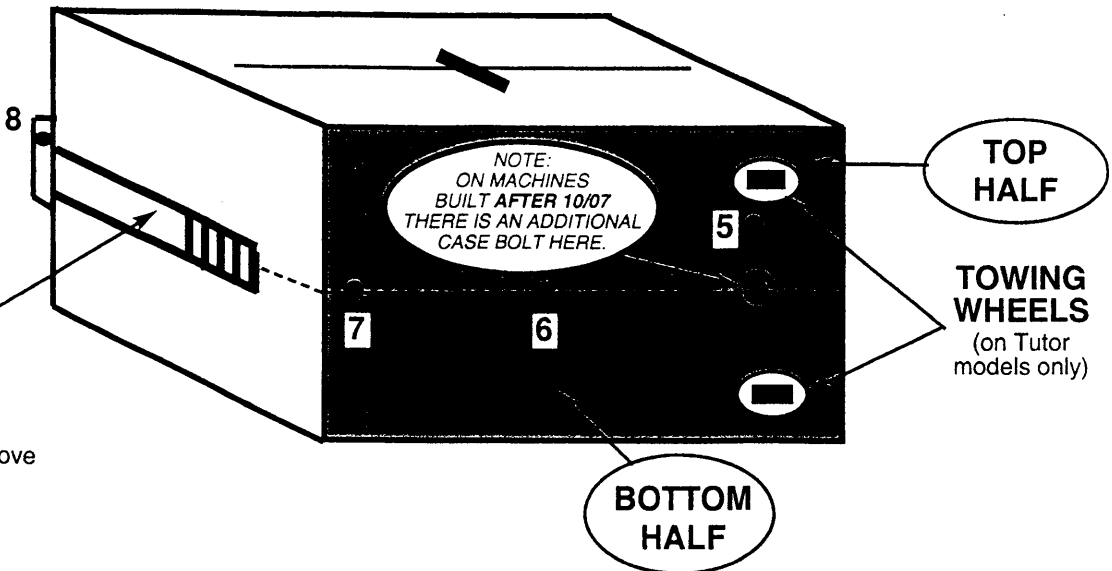


TOWING HANDLE
 (on Tutor only)
 on Tower models remove AC cord bracket to separate top half

TOWING WHEELS
 (on Tutor models only)

TOP VIEW
 Looking down into opened machine

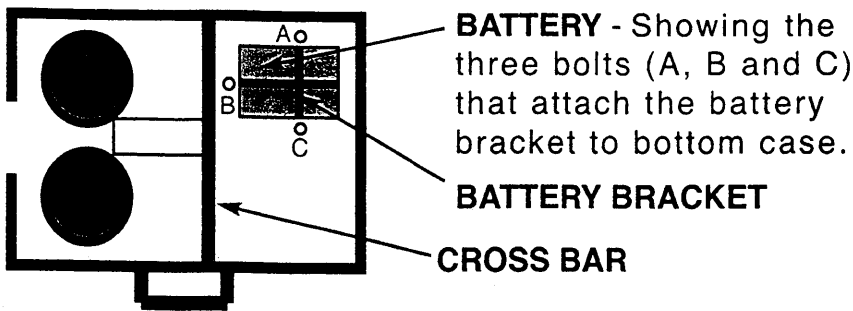

BATTERY BRACKET
CROSS BAR



Underside of machine showing t